

RoHS

SYMBOL	REV.	REVISION	APPROVAL	DATE

SPECIFICATIONS

1. ELECTRICAL CHARACTERISTICS:

- 1-1.RATING: DC 12V 1A
- 1-2.CONTACT RESISTANCE: 30mΩ MAX(INITIAL)
- 1-3.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
- 1-4.INSULATION RESISTANCE: 100MΩ MIN,MEASURED BY 500V DC




2. MECHANICAL CHARACTERISTICS:

Insertion and extraction force: 0.3~3kgf


3. LIFE TEST: 5,000 CYCLES MIN

4. SALT MIST: 48HOURS

5. FOR HAND SOLDERING LEAD FREE PROCESS

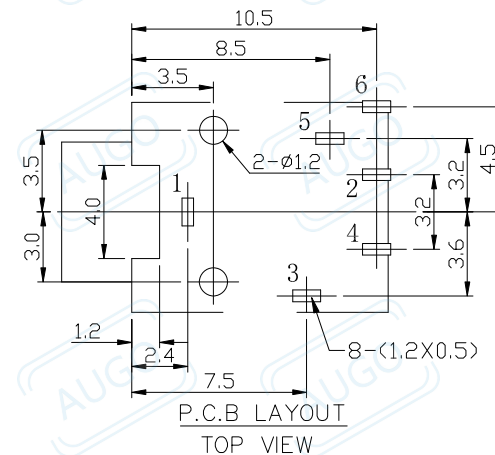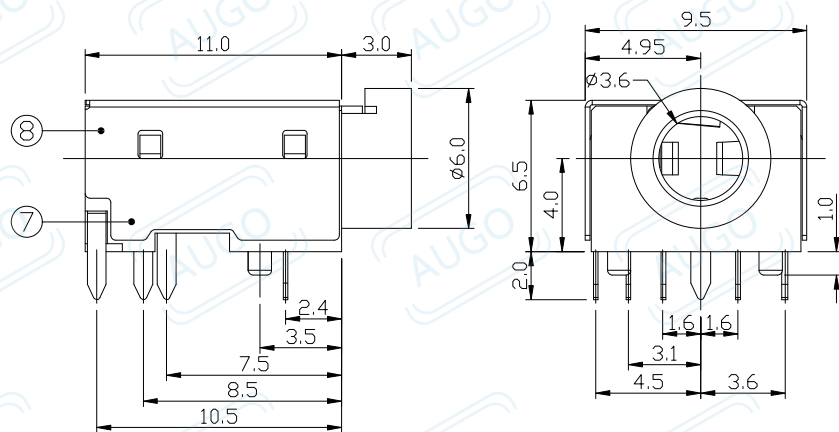

SCHEMATIC

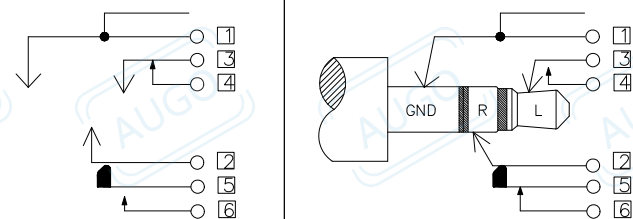

8	SHELL	1	SUS	NATURE
7	HOUSING	1	PA9T	BLACK
6	CONTACT FOOT	1	C5191 T=0.2mm	Ag-Plating
5	SPRING PIECE	1	C5191 T=0.2mm	Ag-Plating
4	CURVE PIECE	1	C5191 T=0.2mm	Ag-Plating
3	SPRING PIECE	1	C5191 T=0.25mm	Ag-Plating
2	SPRING PIECE	1	C5191 T=0.2mm	Ag-Plating
1	CONTACT FOOT	1	C5191 T=0.2mm	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DONGGUAN AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		Ø3.50mm PHONE JACK		DRAWING	Z.L.Liang	DWG.No.	
PART NO.		PJ-3045-P20		CHECK	G.C.Chen	REV.	A0
	UNIT :	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X ± 0.2 X.XX ± 0.15 X.XXX ± 0.1	ANGLE	G.C.Chen	DATE	2016-7-12
				±2°	SCALE	1:1	PAGE 1 OF 1