

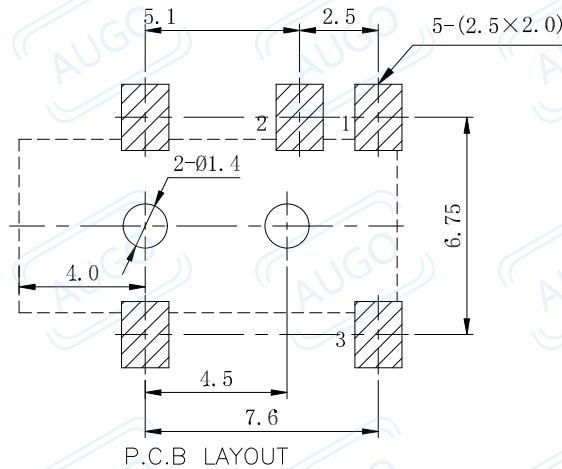
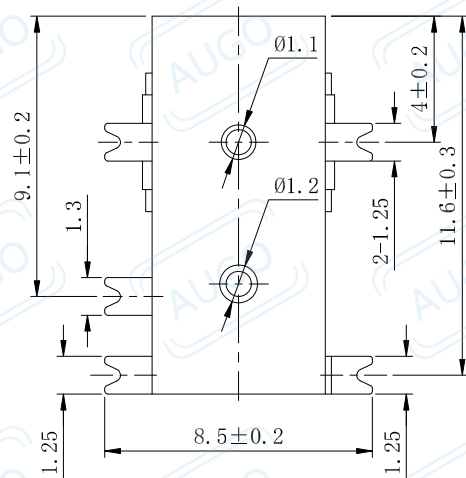
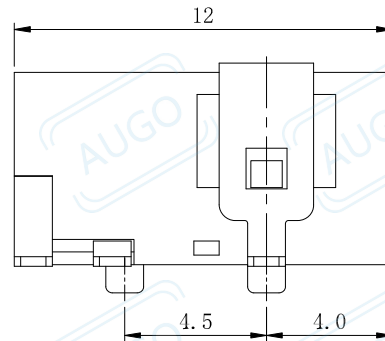
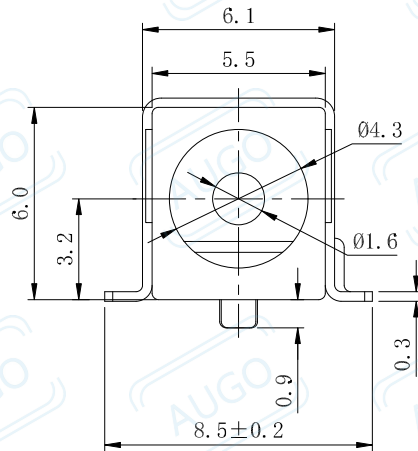


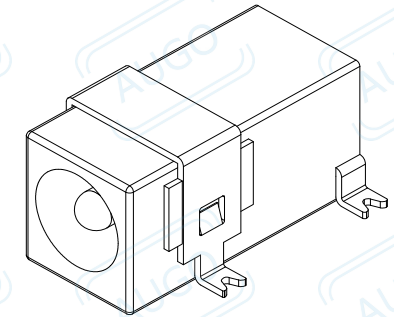

SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
 - 1-1.RATING: DC 3A 20V
 - 1-2.CONTACT RESISTANCE: 50mΩ MAX(INITIAL)
 - 1-3.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4.INSULATION RESISTANCE: 100MΩ MIN,MEASURED BY 500V DC
- MECHANICAL PERFORMANCE
 - 2.1.OPERATING FORCE :0.5-3.0kgf
- LIFE TEST
 - 3.1.ELECTRONICS LIFE TEST 5,000 CYCLES.
- MEASURING CONDITION:
 - 4.1.TEMPERATURE:FROM 5℃ TO 35℃
 - 4.2.RELATIVE HUMIDITY:FROM 45% TO 85%RH .
- ENVIRONMENTAL SPECIFICATIONS:
 - 5.1.HUMIDITY TEST:HUMIDITY 90% TO 95% TEMPERATURE 40 ±2℃ FOR 96 HOURS.
 - 5.2.HEAT TEST: TEMPERATURE 80 ± 2℃ (HUMIDITY BELOW 50%)



NO.	DESCRIPTION	MATERIAL	QTY.	PLATING
1	HOUSING	PPA	1	BLACK
2	COVER	BRASS	1	Ag Plated
3	STATIC CONTACT	BRASS	1	Ag Plated
4	SPRING CONTACT	PHOSPHOR BRONZE	1	Ag Plated
5	PIN TEMRINAL	BRASS	1	Ag Plated

DONGGUAN AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		DC POWER JACK				DRAWING	G.C.Chen	DWG.No.			
PART NO.		DS-098S-TR				CHECK	G.C.Chen	REV.	A		
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL		DATE			
	ABOVE 5 ~30		±0.3								
	mm		ABOVE 30	±0.5		0°±3'	SCALE		2:1		PAGE
	ANGLE	±3°									
										1 OF 1	