

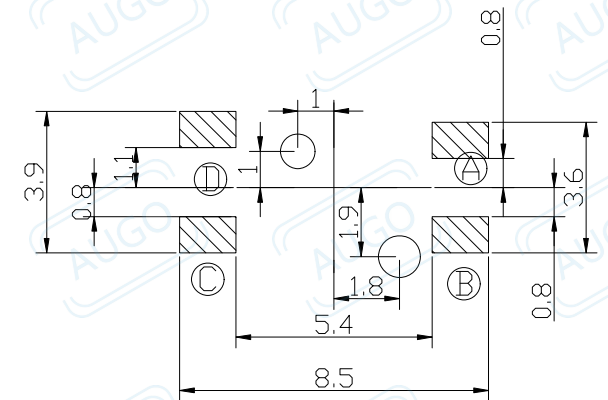
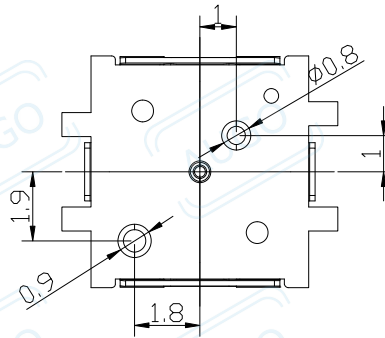
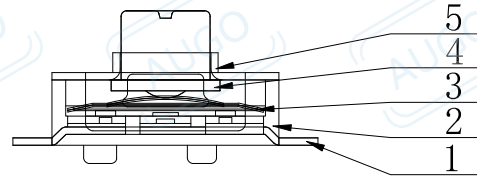
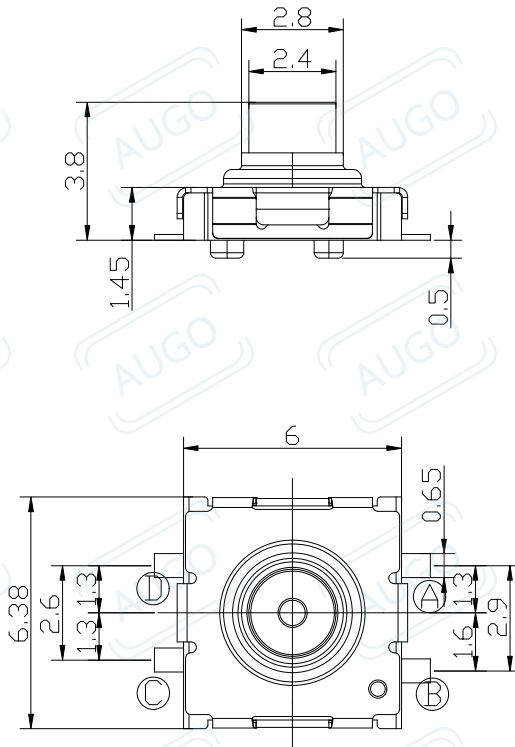


主要技术规格:

1. 额定值: 50mA DC12V
2. 接触电阻: $\leq 100\text{m}\Omega$
3. 操作力: 1st: $115\pm 100\text{gf}$
2st: $350\pm 100\text{gf}$
4. 行程: 1st: $0.3\pm 0.15\text{mm}$
2st: $0.5\pm 0.2\text{mm}$
5. 绝缘电阻: $\geq 100\text{M}\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿命: 20,000 Cycles
8. 工作温度范围: $-40\sim 90^{\circ}\text{C}$



PCB LAYOUT (线路板布局图)



5	端子	磷青铜	1	镀银
4	基座	LCP	1	耐温280℃ (白色)
3	簧片	不锈钢	1	覆银
2	盖板	不锈钢	1	/
1	按钮	LCP	1	耐温280℃ (白色)
序号	零件名称	材料规格	数量	备注

DONGGUAN AUGO ELECTRONICS CO.,LTD.

PART NAME		TACT SWITCH				DRAWING		Y,C,ZHANG		DWG.No.			
PART NO.		TD-D0572				CHECK		G.C.Chen		REV.		A1	
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~ 30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±3°	ANGLE	APPROVAL				DATE		14-10-2024	
	mm					SCALE		2:1		PAGE		1 OF 1	