
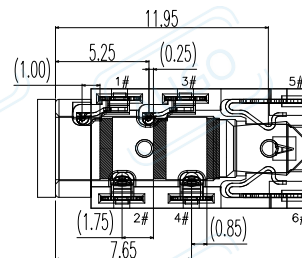



RoHS Compliant
Halogen Free


SYMBOL	REV.	REVISION	APPROVAL	DATE

NOTES






1. CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 100mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;



4极插头接触点位置尺寸

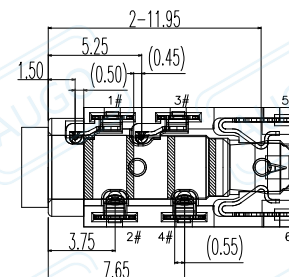

5极插头接触点位置尺寸

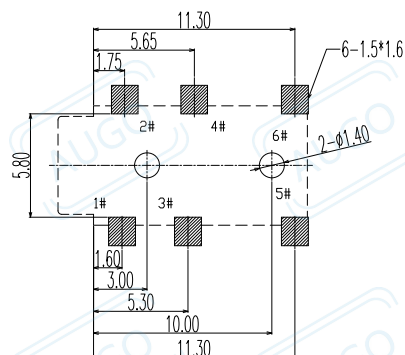

P.C.B LAYOUT
TOP VIEW

1 MIC 3 DET 5 LET 6 DET 4 RT 2 GND		
1 MIC 3 DET 5 LET 6 DET 4 RT 2 GND		

7	HOUSING	1	HIGH TEMP PLASTIC,COLOR BLACK.	
6	TERMINAL 6#	1	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	
5	TERMINAL 5#	1	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	
4	TERMINAL 4#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	
3	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	
2	TERMINAL 2#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	
1	TERMINAL 1#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

DONGGUAN AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	STEREO JACK (4 POLES)	DRAWING	Y.C.Zhang	DWG.No.	
PART NO.	PJ-35A112	CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE UNLESS OTHERWISE SPECIFIED	WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	ANGLE ±2°	APPROVAL	G.C.Chen
			SCALE	1:1	DATE 2018/12/28
				PAGE	1 OF 1