
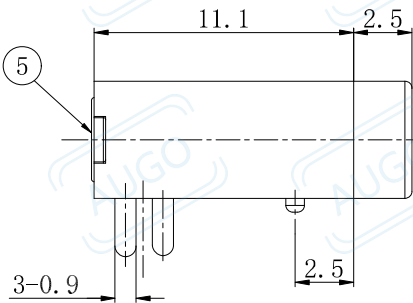
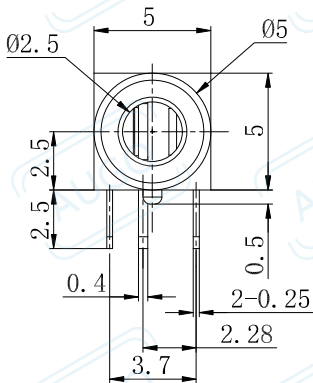
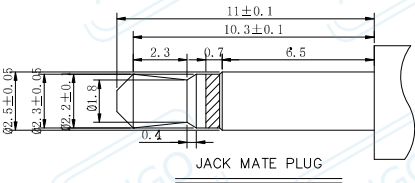





RoHS

SYMBOL	REV.	REVISION	APPROVAL	DATE

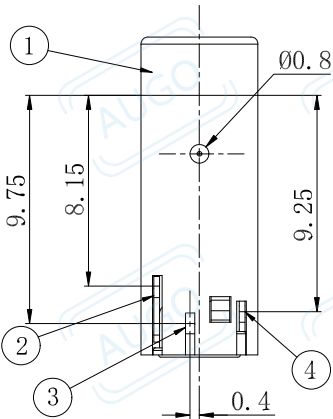

SPECIFICATIONS

1. ELECTRICAL CHARACTERISTICS:
 - 1-1.RATING: DC 0.5A 30V
 - 1-2.CONTACT RESISTANCE: 50mΩ MAX(INITIAL)
 - 1-3.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4.INSULATION RESISTANCE: 100MΩ MIN,MEASURED BY 500V DC
2. MECHANICAL PERFORMANCE
 - 2.1.OPERATING FORCE :0.5-5.0kgf
3. LIFE TEST
 - 3.1.ELECTRONICS LIFE TEST 5,000 CYCLES.
4. MEASURING CONDITION:
 - 4.1.TEMPERATURE:FROM 5℃ TO 35℃.
 - 4.2.RELATIVE HUMIDITY:FROM 45% TO 85%RH .
5. ENVIRONMENTAL SPECIFICATIONS:
 - 5.1.HUMIDITY TEST:HUMIDITY 90% TO 95% TEMPERATURE 40 ±2℃ FOR 96 HOURS.
 - 5.2.HEAT TEST:TEMPERATURE 85± 2℃ (HUMIDITY BELOW 50%)
 - 5.3.COLD TEST:TEMPERATURE -25± 2℃ FOR 96 HOURS.

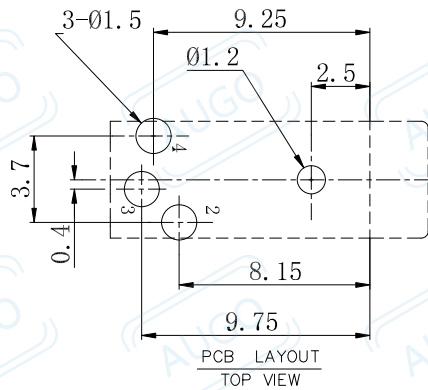

No.	DESCRIPTION	MATERIAL	QTY	PLATING/COLOR
1	HOUSING	PA66	1	BLACK
2	SPRING CONTACT	BERYLLIUM COPPER	1	Ag
3	TERMINAL	BRASS	1	Ag
4	TERMINAL	BRONZE	1	CuZn
5	COVER	PA66	1	BLACK

DONGGUAN AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		PHONE JACK			DRAWING	Y.C.ZHANG	DWG.No.	
PART NO.		PJ-2104			CHECK	H.Y.ZHU	REV.	A0
	UNIT :	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X ± 0.3	ANGLE	APPROVAL	G.C.CHEN	DATE	2021/01/26
	mm		X.XX ± 0.2 X.XXX ± 0.1		±2°	SCALE	1: 1	PAGE