




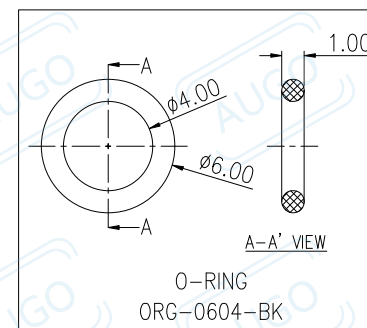
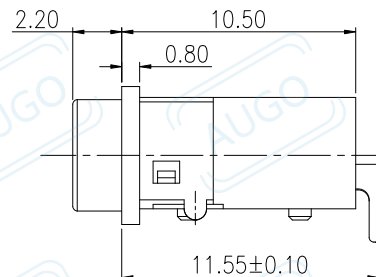
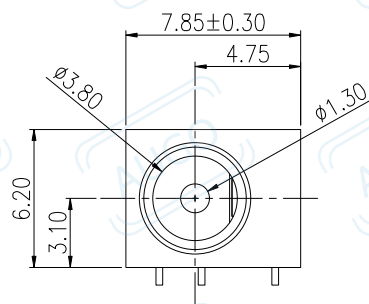
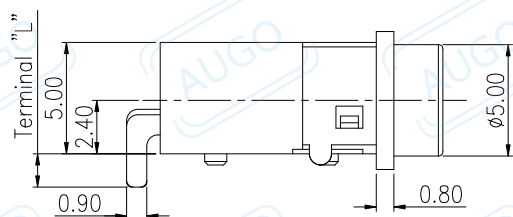


IP-X7
30min/1m



SCHEMATIC

SYMBOL	REVISION	APPROVAL	DATE

1. ELECTRICAL CHARACTERISTICS:
 - 1-1.RATING: DC 12V 5A
 - 1-2.CONTACT RESISTANCE: 30mΩ MAX(INITIAL)
 - 1-3.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4.INSULATION RESISTANCE: 100MΩ MIN,MEASURED BY 500V DC
2. MECHANICAL CHARACTERISTICS:
 - 2-1.OPERATING FORCE :0.5-2.0kgf
3. LIFE TEST:5,000 CYCLES MIN
4. PACKING:BAG (800PCS/REEL)

No.	DESCRIPTION	MATERIAL	PLATING
1	HOUSING	PA10T UL94-V0	BLACK
2	COVER	PA10T UL94-V0	BLACK
3	TERMINAL #1	C5210-H	Au PLATED
4	TERMINAL #2	C5210-H	Au PLATED
5	TERMINAL #3	C2680-H	Au PLATED
6	TERMINAL	C2680-H	Ag PLATED
7	O-RING	SILICA GEL	BLACK

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		DC POWER JACK			DRAWING	Z.L.Liang	DWG.No.	DS0019
PART NO.		DS-152-Txx-WP			CHECK	G.C.Chen	REV.	A0
	UNIT :	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X ± 0.3	ANGLE	APPROVAL	G.C.Chen	DATE	2016-May-03
	mm		X.XX ± 0.2 X.XXX ± 0.1		0'±3"	SCALE	1:1	PAGE

F

E

D

C

E

A