
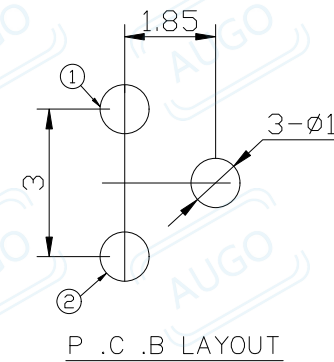
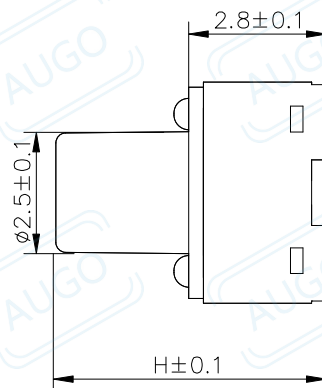






FOR REFERENCE ONLY

RoHS Compliant

SYMBOL	REV.	REVISION	APPROVAL	DATE

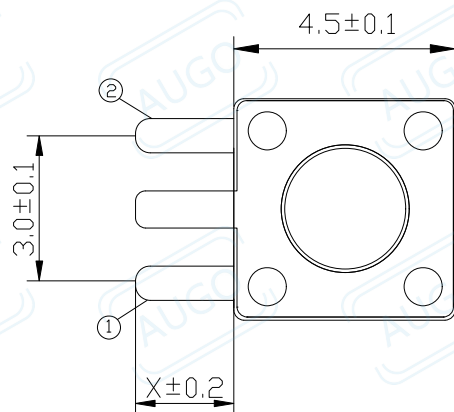

height model selection	
	H=3.8mm
	H=4.0mm
	H=4.3mm
	H=4.5mm
	H=5.0mm
	H=5.5mm
	H=6.0mm
	H=6.5mm
	H=7.0mm
	H=8.0mm
	H=9.0mm
X	2.0
	3.0

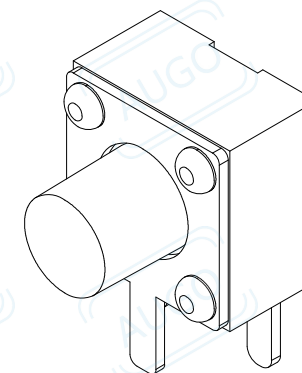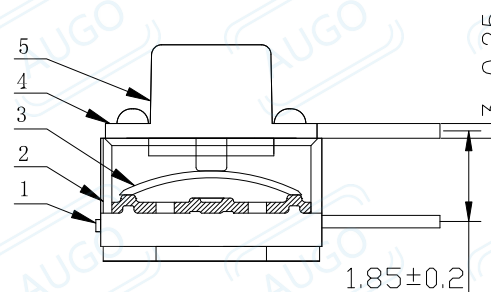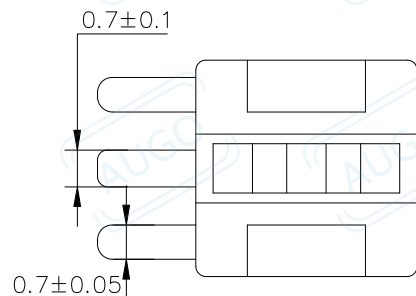

NO.	NAME	MATERIAL	QTY	REMARK
1	TERMINAL	C2680	2	Ag plating(0.2um min)
2	CASE	PA9T	1	Black
3	CONTACT	SUS301	1	Ag plating(0.2um min)
4	COVER	H65	1	Cu/Sn Plating(Cu 2um min, Sn 1um min)
5	STEM	PA9T	1	Black

SPECIFICATIONS	
Operating temperature range	-30° to +85°
Rating	DC 12V 50mA Max.
Contact Resistance	100mΩ Max
Dielectric strength	250V AC for 1min.
insulation resistance	100mΩ Min. 100V DC
Travel	0.25±0.1mm
Operating Life(cycles)	100, 000 CYCLES

DONGGUAN AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		TACT SWITCH		DRAWING	Z.L.Liang	DWG.No.	A0
PART NO.		TC-1109D-H-X		CHECK	G.C.Chen	REV.	
	UNIT :	TOLERANCE UNLESS	X.X ± 0.3	ANGLE	APPROVAL	G.C.Chen	DATE
	mm	OTHERWISE SPECIFIED	X.XX ± 0.2 X.XXX ± 0.1	±2°	SCALE	1:1	PAGE

1 OF 1