
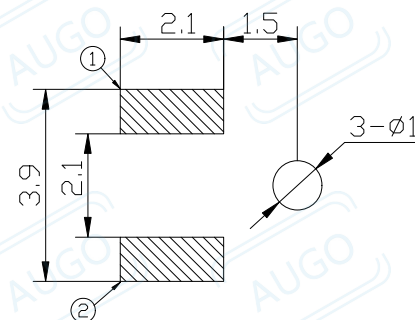
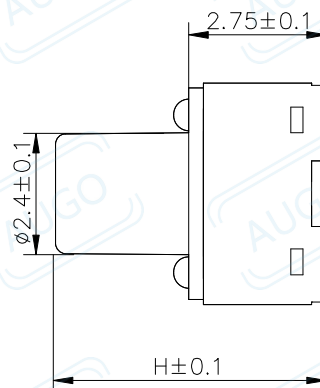


FOR REFERENCE ONLY



RoHS Compliant

SYMBOL	REV.	REVISION	APPROVAL	DATE


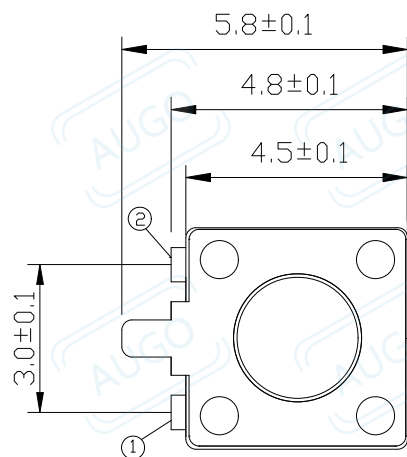


P.C.B LAYOUT

height model selection
H=3.8mm
H=4.3mm
H=4.5mm
H=4.8mm
H=5.0mm
H=5.5mm
H=6.0mm
⋮
H=12.0mm

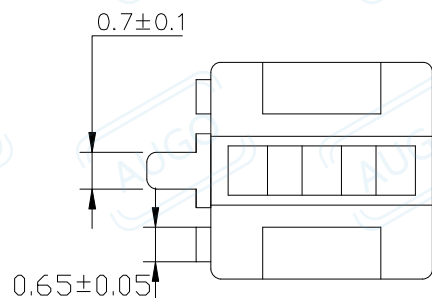

CIRCUIT DIAGRAM

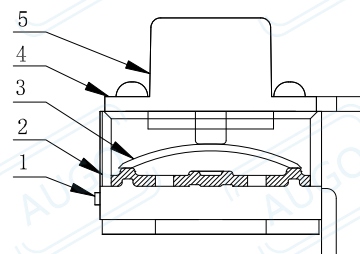

NO.	NAME	MATERIAL	QTY	REMARK
1	TERMINAL	C2680	2	Ag plating(0.2μm min)
2	CASE	PA9T	1	Black
3	CONTACT	SUS301	1	Ag plating(0.2μm min)
4	COVER	H65	1	Cu/Sn Plating(Cu 2μm min, Sn 1μm min)
5	STEM	PA9T	1	Black

SPECIFICATIONS	
Operating temperature range	-30° to +85°
Rating	DC 12V 50mA Max.
Contact Resistance	100mΩ Max
Dielectric strength	250V AC for 1min.
insulation resistance	100mΩ Min. 100V DC
Travel	0.25±0.1mm
Operating Life(cycles)	100, 000 CYCLES

DONGGUAN AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		TACT SWITCH		DRAWING	Z.L.Liang	DWG.No.	
PART NO.		TD-1110S-H		CHECK	G.C.Chen	REV.	A0
	UNIT :	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X ± 0.3	ANGLE	APPROVAL	G.C.Chen	DATE
			X.XX ± 0.2				
	mm		X.XXX ± 0.1	±2°	SCALE	1:1	PAGE
							1 OF 1