


Rohs

IP67










REV.	DESCRIPTION	DRAW.	DATE.
A0	NEW RELEASE	Y.C.ZHANG	2024/07/20


NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. DUSTPROOF AND WATERPROOF GRADE IP67.

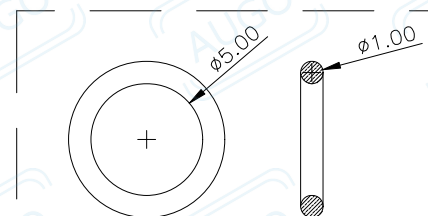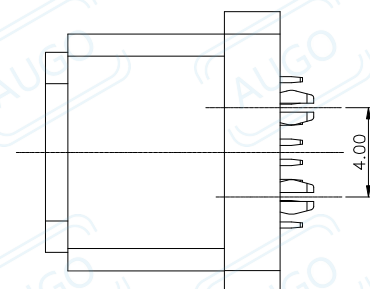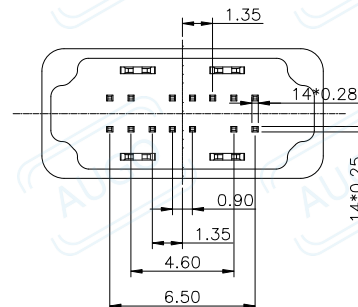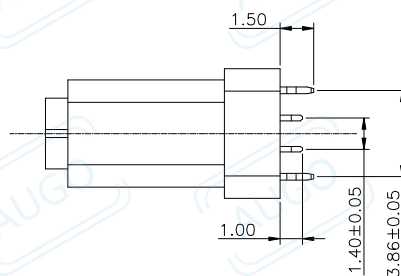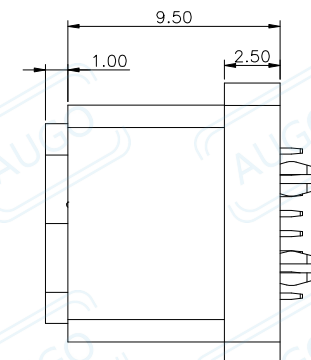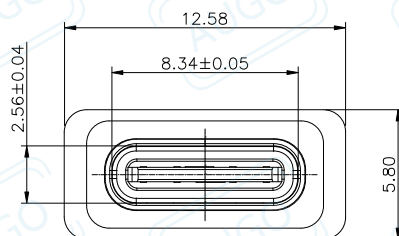

注: 防水圈是圆形截面, 直径为1.0mm的硅胶圈, 防水圈挤压量, 由1.0mm挤压到0.4mm ~ 0.5mm, 防水效果最好



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

AUGO

东莞市欧高电子有限公司
Dongguan Augo Electronics Co.,Ltd
地址: 广东省东莞市黄江镇新市东江路8号富汇创园 电话: 0769-83383791

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

REV:	01
SIZE:	A4
SCALE: 1:1	UNIT: mm
SHEET: 1/1	

UNLESS OTHERWISE SPECIFIED, TOLERANCE:	
X.	±0.20
X.x	±0.15
X.xx	±0.10
ANGULAR	±2°

TITLE:	TYPE-C CONNECTOR
PART NO:	US04-105LC-0011

SHELL	CONTACT	SOLDER	PAKING	SHELL MATERIAL
NI	Fu" Au	Fu" Au	TRAY	SUS
DESIGN	G.C.CHEN	DATE	2024/07/19	
DRAWING	Y.C.ZHANG	DATE	2024/07/19	
CHECK	D.J.WANG	DATE	2024/07/20	
SCALE	1:1	PAGE	1 OF 1	