

Rohs

REV.	DESCRIPTION	DRAW.	DATE.

Material:

Insulator : NYLON 9T (UL94V-0)

Contact : Phosphor Bronze

Contact Plated : Gold over Nickel or Tin

Specification:

Current Rating : 7A







Voltage Rating : 20V

Contact Resistance : 30mΩ Max.

Insulation Resistance : 100MΩ Min.

Dielectric Voltage : 500V

Operating Temperature : -25°~85°

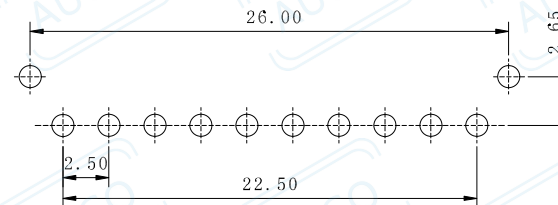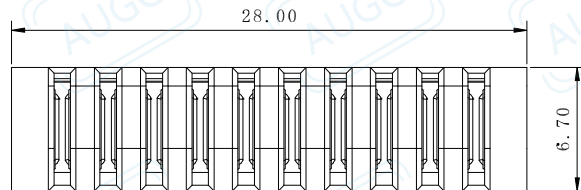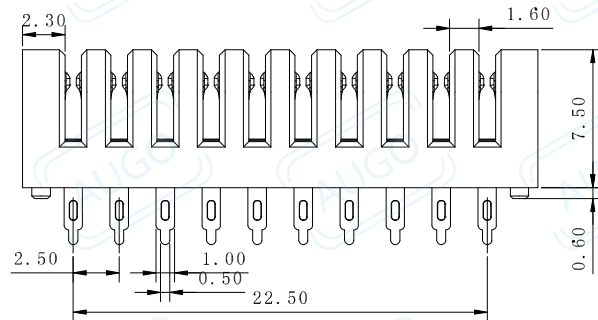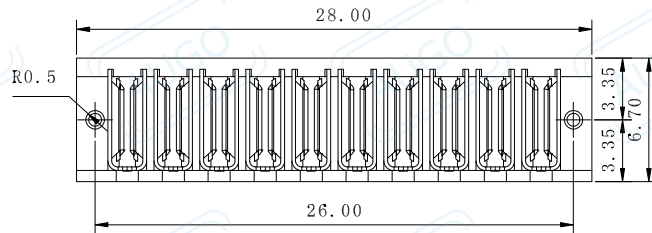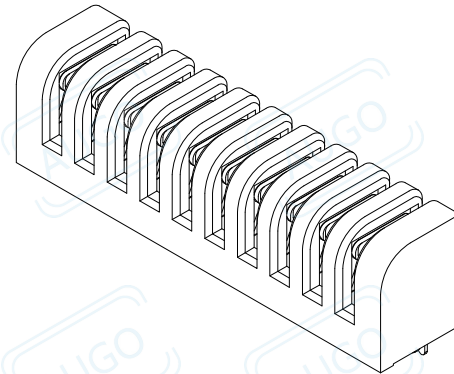

AUGO

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:

01

SIZE:

A4

SCALE:1:1

UNIT:mm

SHEET:1/1

⊕

UNLESS OTHERWISE SPECIFIED,TOLERANCE:

X. ±0.25

X.x ±0.20

X.xx ±0.15

ANGULAR ±2°

TITLE:

BATTERY FEMALE 2.5 PITCH BOARD TO BOARD CONNECTOR

PART NO:

AUGO-K1-A-10P

DESIGN

G.C.CHEN

DATE

DRAWING

Y.C.ZHANG

DATE

CHECK

D.J.WANG

DATE

SCALE

1:1

PAGE

1 OF 1