
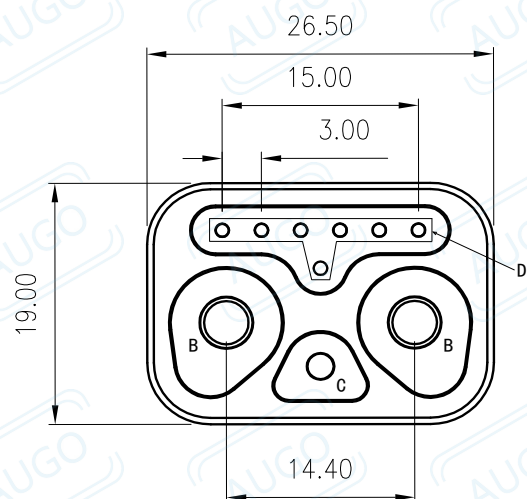



RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE

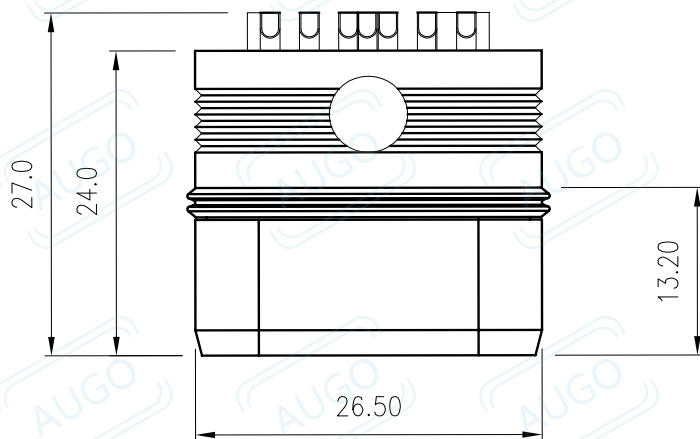

备注:

- 防水等级: IP68
- 电性参数:
 - 额定电流: 45A
 - 接触阻抗: 动力PIN<0.6 mohm 信号PIN<5 mohm
 - 绝缘阻抗: DC1000V ;100M 欧姆
 - 耐电压: 动力PIN:5000VAC 信号PIN:1000VAC 漏电流:2mA
- 插入力:4-10KG;拔出力:4-10KG.
- 插头表面无缩水,变形,缺料,毛边

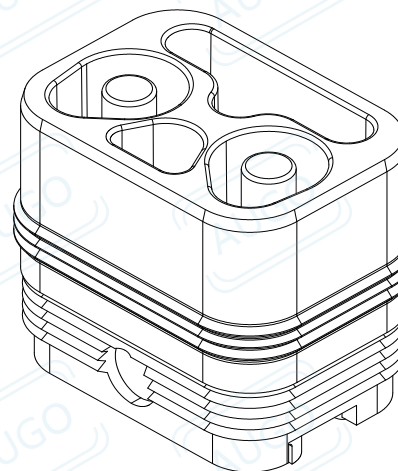

E	密封圈	1	硅橡胶	黑色
D	5A公针	7	4POWPI-J05MP-1975-GB	镀镍60~80u"
C	15A公针	1	4POWPI-J15MP-21D5-GB	镀镍60~80u"
B	45A公针	2	4POWPI-J40MP-26D0-GB	镀镍60~80u"
A	BODY	1	PA66 GF30 UL94 V-0	黑色
序号	名称	数量	材质	电镀&颜色

DONGGUAN AUGO ELECTRONICS CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING		Y. C. ZHANG	DWG. No.		
PART NO.		AUGO-D14M-168F		CHECK		G. C. CHEN	REV.	A0	
	UNIT:	TOLERANCE	X. ±0.5 X.* ±3° X.X ±0.35 X.X* ±2° X.XX ±0.25 X.XX ±1° X.XXX ±0.1 X.XXX ±0.5°	ANGLE	APPROVAL	G. C. CHEN	DATE	12-10-2023	
	mm	OTHERWISE		0° ±3°	SCALE	3:1	PAGE	1 OF 1	